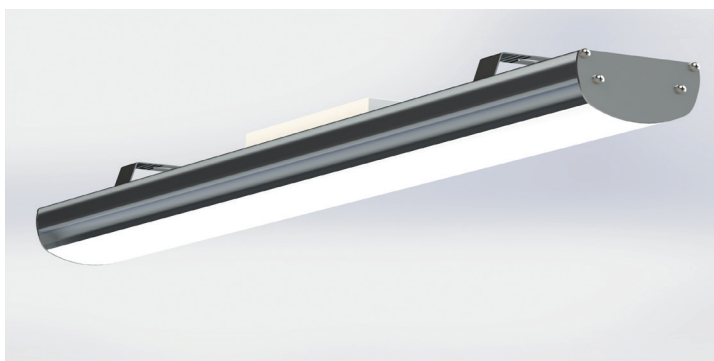




LED



▪ Indoor use

▪ Fixed LED light

▪ LED light source of 120°

▪ High color rendering index 80-85

▪ Excellent thermal management

▪ High light intensity, no glare

INLINE	600	1200
Order No.	1002271	1002272

Electrical Characteristics

Nominal Voltage	230 VAC	230 VAC
Operating Voltage	200 - 250 VAC	200 - 250 VAC
Total Power	25 W	40 W 55 W
Power Factor	>0.97	>0.97
Operating Temperature	-20°C to +50°C	


Light Technology Characteristics

Initial Total Lumens	~3300 lm	~5300 lm	~7200 lm
Luminary Efficacy	~132 lm/W	~132 lm/W	~130 lm/W
CCT	~5000K		
CRI	80 - 85		

Protection & Construction

IP Protection	IP40	
Protections	OVP, OTP	
Diffuser	PMMA	
Housing	Anodized aluminium nature	
Conecting Terminal	L,N,PE max 3x2.5mm²	
Fixture Weight	1.04kg	1.54kg
Lifespan(on 25°C)	60 000 hours	

POLAR CURVE






Inline model	Available Beam Angle
600	120°
1200	120°

DIMENSIONS, CONNECTION



Inline	600	1200
A	610mm	1210mm
B	410/2x $\varnothing$ 5mm	1010/2x $\varnothing$ 5mm
C	60mm	60mm
D	70mm	70mm

ACCESSORIES

	Mounting Bracket with Cable Suspension		Magnetic Mounting Bracket		Custom-made Bracket on Request
--	---	---	----------------------------------	---	---------------------------------------

data.com

DATA LINK, Bjelovar
Blajburških žrtava 16, 43000 Bjelovar - Croatia
Phone: +385 (0)43 211 111
E-mail: info@data.com

The content of the broadcast material are the sole responsibility of company DATA LINK.

The project is co-financed by the European Union from the European Regional Development Fund.

Together to EU funds



European Union



www.strukturnifondovi.hr

